



LED Flood light X Series




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size
LPFL-10X01	● 10W	850LM	N	137x32x118mm
LPFL-20X01	● 20W	1720LM	N	180x37x187mm
LPFL-30X01	● 30W	2650LM	N	193x37x197mm
LPFL-50X01	● 50W	4000LM	N	258x42x257mm
LPFL-70X01	● 70W	6380LM	N	261x59x268mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size
LPFL-100X01	● 100W	8660LM	N	285x65x285mm
LPFL-150X01	● 150W	14000LM	N	345x70x370mm
LPFL-200X01	● 200W	18000LM	N	345x110x375mm
LPFL-400X01	● 400W	36000LM	N	405x105x425mm



LED Flood light X Series

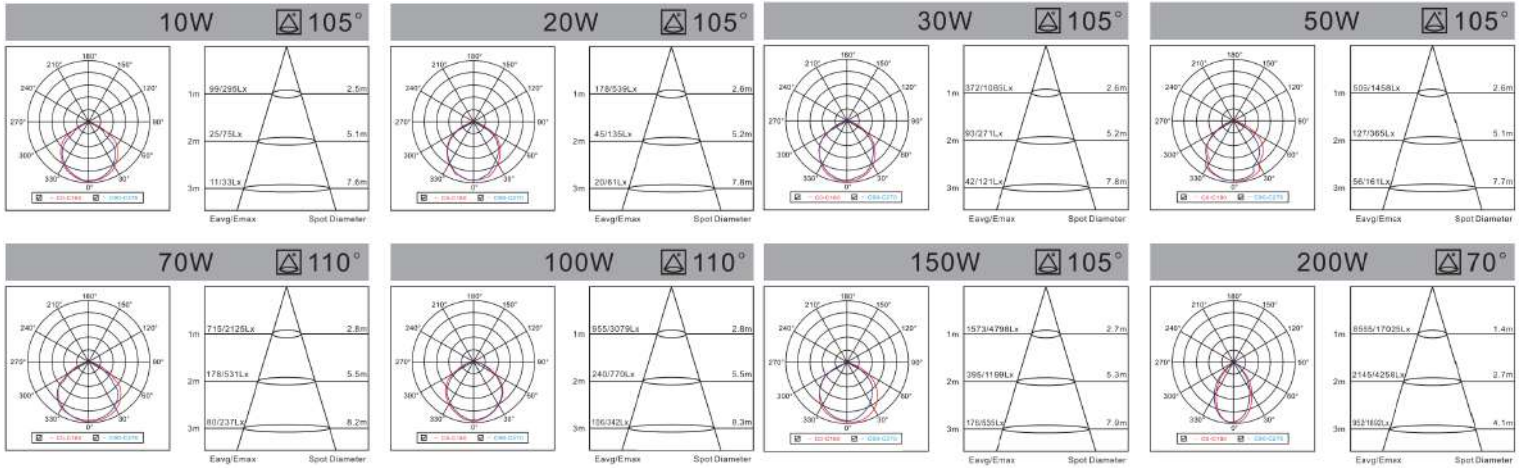

Product Overview

Energy efficiency class	A+
PF	>0.8
CCT(K)	3000K/4000K/6500K
CRI(Ra)	>80
Voltage (V)	AC220-240
Current (mA)	180
Frequency(Hz)	50/60
Beam Angle (deg)	130°
Lifespan (hrs)	30000/100000 Switching Cycles
Working Temperature (C)	-45~50
Storage Temperature (C)	-15~50



LED Flood light X Series




Physical data

Weight(g)	400 / 650 / 700 / 1250 / 1460 / 1900 / 3100 / 3100 / 3850
Designed for optimum use in non standard conditions	No
Fluorescent lamp replacement	No
Single packaging type	BOX
Single package dimensions (L x W x H)(mm)	100x38x145 / 1pcs 139x41x185 / 1pcs 147x41x199 / 1pcs 204x46x265 / 1pcs 222x63x264 / 1pcs 300x63x254 / 1pcs 397x92x340 / 1pcs 350x115x280 / 1pcs

* Do not use in close luminaire

Technical Drawings

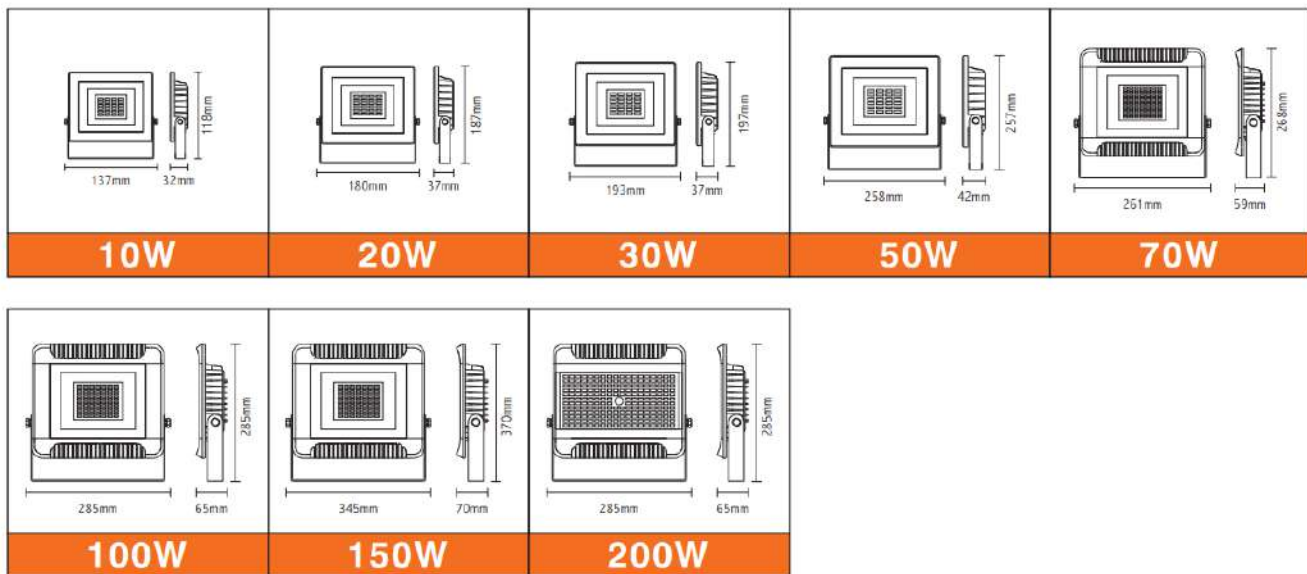

LED Flood light X Series



Energy Label



SMD breakdown drawing

